ninerine

Architectural Wall Cladding

SOLUTIONS

NINELINE[™] Pleat






Be captivated by the interplay of light and shadow with this reimagined interpretation of the classic corrugated profile.


Expand your access to different profile shapes with Stratco. The striking triangulated form features a 90mm rib height, emphasising sharpness of shadows and finish, particularly when applied en masse.

The minimal pan width reduces direct contact with the substrate, resulting in less thermal transfer and improved condensation management when compared to traditional metal profiles.

Features at a glance:

- Rib Height: 90mm
- Coverage: 590mm
- BMT: 0.55mm
- Fixing Method: Pierced Fix
- Maximum Length: 6.0m
- Minimum Length: 0.3m
- Available in Colorbond® Standard, Matt Finish, ULTRA, Metallic and Stratco Bronze.



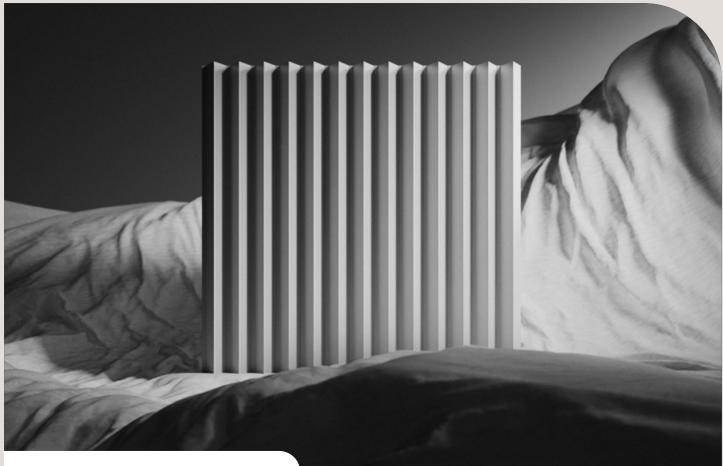

NINELINE [™] Pleat

TECHNICAL INFORMATION:

For all specification and detailing information scan the QR code.



APPLICATION:

Wall Cladding

- External and internal use

P/TRATCO

1300 155 155 | stratco.com.au

Scan this QR code to



find a Stratco near you.



The information contained within this brochure is for general use and information only. Stratco Australia recommends that you obtain appropriate expert advice confirming the suitability of product(s) and information in relation to the proposed application.

All brand names, images accompanied by ® or ™ remain the property of Stratco Australia.